


A close-up photograph of a Linde H30 EVO forklift's rear wheel. The tire is a large, treaded solid tire with 'ECOGRID' and 'SOLID EUROPEAN TECHNOLOGY' embossed on it. The wheel is mounted on an orange hub with multiple bolts. The forklift's body is orange and black, with 'Linde H30 EVO' printed on it. The forklift is positioned on a dark grey, textured temporary flooring mat (Bodenmat) that is laid over a grassy area. The EcoGrid logo, a grid of squares, is visible in the top right corner.

ECOGRID®

Temporary Flooring
Bodenmat

Floormat Economy

Protect, saves, insulates

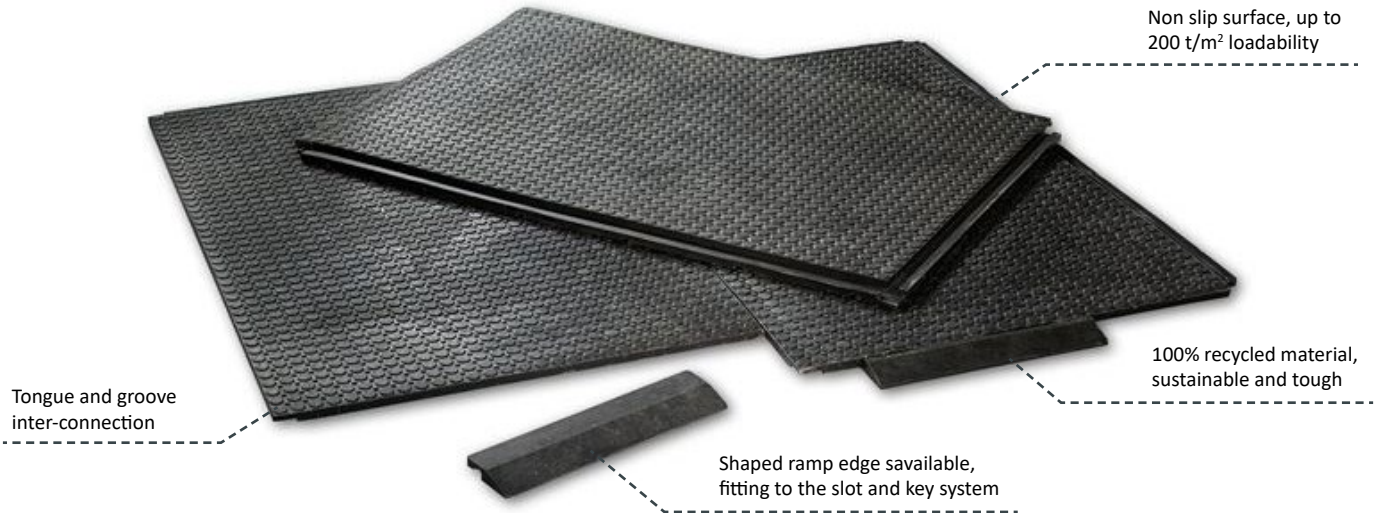

As Versatile As Your Application

The floormat economy can be placed on top of solid ground (such as concrete) without any spadework. Thanks to the tongue and groove system every single mat can be placed quickly, easy and safe. If needed you can easily adapt the mats to obstacles by simply using a normal jigsaw or similar tools. The easy laying and the simple workmanship allow a huge range of application. The floormats can be picked up again at any time without any effort! This makes the mats ideal for temporary soil protection during events, as an insulating bottom layer in marquees or just as a tough shop flooring. Impact noise will be reduced significantly.

Using the optional ramped edges, health and safety is greatly improved and makes the system fully disabled access compliant. The Bodenmat system also incorporates an integrated drainage system, increasing weather protection.

Close up

The floormat economy reduces loads, isolates effectively against rising cold and allow rainwater to run off beneath the floormat area. On request an optional drainage system is available.

The approved tongue and groove inter-connecting system offers simple, safe and quick laying opportunities.



Your Advantages

- ✓ 200 t/m² load ability according to DIN EN ISO 179, impact bending test/ strength testing
- ✓ Heavy duty, easy to clean, durable
- ✓ Quick and easy to deploy
- ✓ Approved slot and key interconnection
- ✓ Oil, grease and ammonia resistant, diluted chemicals in accordance to DIN 51958
- ✓ Fire class B1 (low-flammable), DIN 4102
- ✓ Made from 100% recycled material
- ✓ UV and frost resistant

Specifications

Type	Floormat economy
Dimensions	1200 x 800mm
Thickness	22mm
Loadability	200 t/m ² (DIN EN ISO 179)
Fire class	B1, low-flammable
Weight, each mat	20kg
Material	100% recycled material
Interconnection	Slot and key system
Laying	Loosely laid, on solid ground
Pieces per pallet	50
m ² per pallet	48



sales@ecogrid.co.uk | 0151 639 4281 | ecogrid.co.uk

Crystal House, 28-29 Wheatland Business Park, Wheatland Lane, Wallasey, Wirral, CH44 7ER