



EcoSedum Pack Light

This is the complete extensive vegetation system, a light pre-cultivated pack for immediate laying and turnkey solutions; a self-contained structure particularly well suited to the retention of substrate on sloping roofs. Up to 20% slope is ideal (max 35%). No Intermediate gravity-resistant device is required in normal circumstances (please seek advice if unsure). The EcoSedum Pack Light consists of a selection of sedum varieties adapted to the roof and its environment.



Technical Data

4 trays	1m ²
Roof coverage rate	>80%
Material	PE/PP 1-- Recycled
Colour	Black
Weight at CME	60kg/m ²
Weight of a CME Max.	Max. 14.4kg
Water retention capacity at CME	25 l/m ²
Runoff coefficient	0.4
Dimensions	40 x 60cm
Empty height	65mm
Slope	35% (for roofs over 35%, seek professional advise)

Installation Tips

Installation on anti-root treated waterproofing up to 24 hours after receipt.


Cutting of tray is done with a cutting blade/disk.

Position the cut trays in the middle of the terrace and block the substrate with a filter membrane.

Water extensively after laying (5 to 10 mm/m² depending on the region).

Maintenance: 1 annual maintenance minimum; Personal Protection Equipment (E.P.1); Accessible water point.

Example installation method

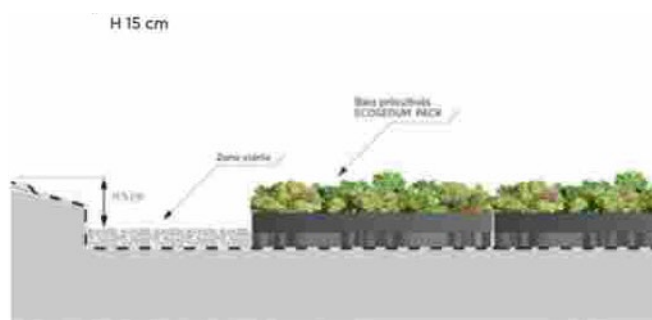

Ecosedum Pack system and clean gravel zone



Clean Stone Zone